

reddot winner 2020

JANE

semi-recessed / surface / suspended


EN Highly flexible light rope made of food grade silicone for creative and decorative design; extremely slim design (only 18 mm diameter); for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools); completely homogeneously illuminated, matt surface; 360° light emission; energy-efficient LEDs with very good colour rendering; optionally with external converter for ceiling installation or suspended in combination with the light rope (available as an accessory)

II Cavo luminoso altamente flessibile in silicone alimentare per un design creativo e decorativo; forma estremamente sottile (solo 18 mm di diametro); per montaggio a parete/soffitto o per montaggio a sospensione (cavo di sospensione, regolazione in altezza senza attrezzi); superficie opaca con illuminazione assolutamente omogenea; emissione a 360°; LED ad efficienza energetica con elevata resa cromatica; a scelta convertitore esterno per installazione a soffitto o a sospensione in combinazione con il cavo luminoso (disponibile come accessorio)

Quickinfo

3000K, 4000K
CRI ≥ 90, 3 SDCM
up to 1000lm/m
up to 71lm/W
L80 @ 50000h
non DIM, DALI
IP 40

Types

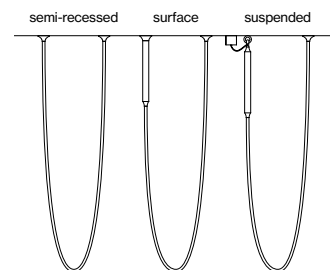

ø18 x 1000-10 000


Canopy colours



Light distribution




360°



many mounting options



dust and insect protection (IP40)



360° light emitting

Order options

COLOUR TEMPERATURE	☐☐
3000K	5
4000K	6


CONTROL	⬆️⬆️
non DIM	1
DALI	3

LENGTH	L
1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4
6000 mm	6
8000 mm	8
10000 mm	0

MATERIAL COLOUR	☑️
○ traffic white RAL 9016	7
● jet black RAL 9005	8



JANE semi-recessed / surface / suspended





LUMINAIRE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4W/m	3000K	812lm/m	0 5 8 - 6 5 1 L :: 1 0
	4000K	1000lm/m	

Mounting accessories

MOUNTING ACCESSORIES

TYPE	L-W-H (mm)	ORDER CODE
1 mounting set recessed	∅ 74-100	0 5 8 - 6 5 9 0 2 1 ☑️
2 mounting set surface	∅ 74-39	0 5 8 - 6 5 9 1 0 1 ☑️
3 mounting set suspended	∅ 50/30-135	0 5 8 - 6 5 9 2 0 1 ☑️
4 clip surface (transparent)	15-21-24	0 5 8 - 6 5 9 1 4 1 0
5 channel surface (transparent)	1000-21-24	0 5 8 - 6 5 9 1 1 1 0
6 mounting ring surface	∅ 39-9-61	0 5 8 - 6 5 9 1 6 1 ☑️
7 mounting ring suspended	∅ 39-9	0 5 8 - 6 5 9 2 6 1 ☑️

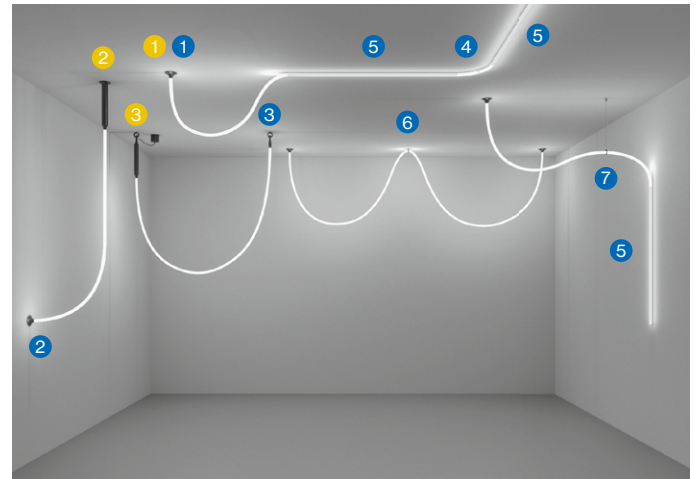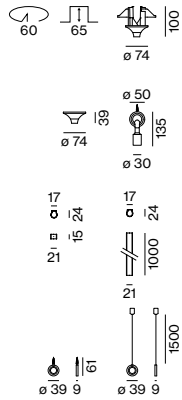

various mounting options with different mounting accessories

Electrical accessories



1 POWER SUPPLY RECESSED 220-240 V AC, 48V, 50-60Hz			
TYPE	L-W-H (mm)	ORDER CODE	
100 W recessed ☐ PC II	350-30-18	0 0 2 - 6 2 1 3 4	
150 W recessed ☐ PC II	350-30-18	0 0 2 - 6 2 1 3 5	
60 W revision opening ☐ PC II	163-43-32	0 0 2 - 6 2 1 3 3	
100 W revision opening ☐ PC II	350-30-18	0 0 2 - 6 2 1 3 4	
150 W revision opening ☐ PC II	350-30-18	0 0 2 - 6 2 1 3 5	
250 W revision opening ☐ PC II	400-40-22	0 0 2 - 6 2 1 3 9	
320 W revision opening ☐ PC I	252-90-44	0 0 2 - 6 0 3 2 0	
DALI device	120-30-22	0 5 8 - 6 5 9 9 3 3 0	

2 POWER SUPPLY SURFACE 220-240 V AC, 48V, 50-60Hz			
TYPE	L-∅ (mm)	ORDER CODE	
100 W surface ☐ PC II	584-∅40	0 5 8 - 6 5 9 1 2 ☑️☑️	
150 W surface ☐ PC II	584-∅40	0 5 8 - 6 5 9 1 3 ☑️☑️	

3 POWER SUPPLY SUSPENDED 220-240 V AC, 48V, 50-60Hz			
TYPE	L-∅ (mm)	ORDER CODE	
100 W suspended ☐ PC II	639-∅40	0 5 8 - 6 5 9 2 2 ☑️☑️	
150 W suspended ☐ PC II	639-∅40	0 5 8 - 6 5 9 2 3 ☑️☑️	
incl. ceiling canopy and 2000mm power cable			

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, rope silicone