

Description

EN Bollard luminaire in aluminium in a simple, minimalist design; luminaire head with integrated cooling fins; $\pm 90^\circ$ tiltable, lockable every 30° ; anodised surface and dark grey powder coated; optional mounting on screw-on base or with anchorage unit (available as an accessory); partially printed safety glass, fixed with stainless steel screws; high quality lens system asymmetrical light distribution; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colour 3000K; CRI ≥ 80 ; min. 95% of the luminous flux after 50 000 hours; degree of protection IP65, with pressure compensation valve and optional surge protection typ 2 with nominal discharge current 3kA; PC I; shock resistance IK07; ambient temperatures from -20°C to $+50^\circ\text{C}$; separate luminaire wiring compartment, suitable for through wiring

FR Borne d'éclairage en aluminium dans un design sobre et épuré ; Tête luminaire avec ailettes refroid. intégrées ; orientable à $\pm 90^\circ$ et fixable tous les 30° ; surface anodisée (protection) et gris foncé peint à la poudre ; Montage au choix vissé sur socle ou avec ancrage béton (disponible comme accessoire) ; verre de sécurité partiellement imprimé, fixé avec vis en inox ; optique lentille grande qualité avec distribution asym. de la lumière ; LED économes en énergie à restitution de couleur élevée ; binning initial ≤ 3 MacAdam ; livrable dans la couleur de lumière 3000K ; CRI ≥ 80 ; min. 95% du flux lumineux au bout de 50 000h de durée de vie ; genre protection IP65, avec soupape compensat. pression & en option protection surtension type 2, courant nominal fuite 3kA ; CP I ; résistance aux chocs IK07 ; Températures ambiantes de -20°C à $+50^\circ\text{C}$; logement séparé de branchement de luminaire, convient à un câblage passant


STREAMCUT

bollard

Quickinfo

3000 K
CRI ≥ 80
L95 @ 50000h
up to 2500lm
non DIM
IK07, IP65

Type



Colour



Light distribution



asym-metric

Order options

IP RATING

IP65

SURGE PROTECTION

yes **5** 2
no 1

COLOUR TEMPERATURE

3000K

CONTROL

non DIM

MATERIAL COLOUR



dark grey



Options on request

COLOR RENDERING INDEX

CRI ≥ 90 (35W)



STREAMCUT bollard




35W version available from Q3/2021

IP65 ASYMMETRIC

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14W	3000K	1120lm	0 8 8 - 2 8 1 5 1 D A
35W	3000K	2500lm	0 8 8 - 2 8 4 5 1 D A

Illumination example

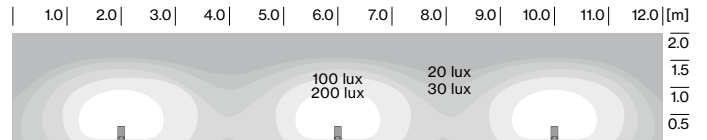

STREAMCUT bollard (14W, 3 luminaires)
Distance between luminaires: 4.30m

Accessory

ANCHORAGE UNIT

TYPE	L·W·H (mm)	ORDER CODE
anchorage unit	84-32-590	0 8 8 - 2 8 9 3 1 1 0

